
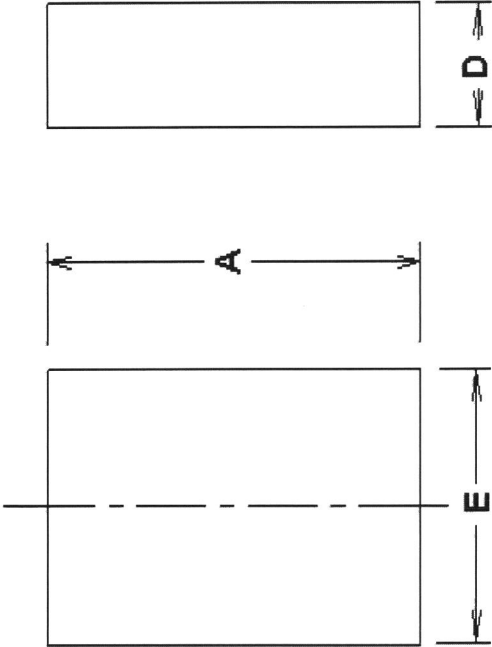


UPDATING UPDATING UPDATING UPDATING UPDATING UPDATING

Finishing Spec Core

Catalog No. 7099-102-06-25-0000



No grinding required The dimensions are as sintered.

GRIND SPECS		B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH	AL VALUE	L CONTROL LIMIT
	inches		inches	inches			per pc. (inches)	nH/T^2	mH
Maximum	#VALUE!								#VALUE!
Nominal	#VALUE!								
Minimum	#VALUE!								#VALUE!

Inductance (AL) Test Conditions mate with:					
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test
					Frequency kHz
					Test Voltage Vrms
					0
					Test Flux Density Gauss

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	4.080	0.255	1.020					
Nominal	4.000	0.250	1.000					
Minimum	3.920	0.245	0.980					